


WOODWORKING VOCABULARY

Roy Ryan

Wood Safety

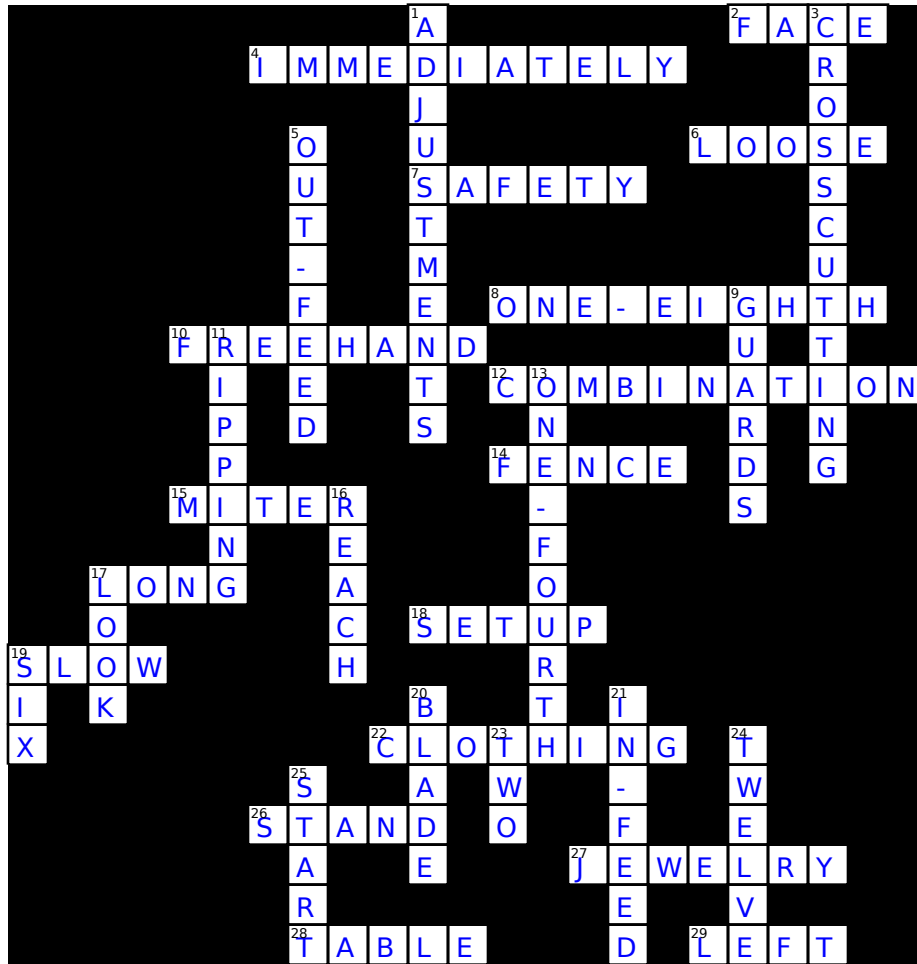

Across

- 2 The ___ grain is against the fence when edge jointing.
- 4 Turn off a machine ___ if it sounds wrong.
- 6 ___ knots should not be run through the planer.
- 7 Get ___ instructions before using a machine.
- 8 The maximum depth of cut on a jointer is ___ inch.
- 10 ___ sawing is not allowed on the table saw.
- 12 A blade that will both crosscut and rip is called a ___ blade.
- 14 The rip ___ supports wood ripped on the table saw.
- 15 The ___ gage supports wood crosscut on the table saw.
- 17 Tie back ___ hair.
- 18 Remove special ___ when finished using it.
- 19 The RPM for large diameter drill bits on the drill press.
- 22 Be careful not to get it caught in spinning machine parts.
- 26 Never ___ in line with a machine blade.
- 27 Remove all ___ before using a machine.
- 28 The planer handwheel raises and lowers the ___.
- 29 Stand to the ___ of the jointer while using it.

Down

- 1 Make all ___ while the saw is stopped.
- 3 Cutting a board across the face grain is called ___.
- 5 The ___ jointer table is the same height as knives.
- 9 Keep all safety ___ in place on machines.
- 11 Cutting a board ___ with the face grain is called ___.
- 13 Raise the table saw blade ___ inch above the wood.
- 16 Never ___ over the table saw blade to get a board.
- 17 Never ___ into the planer.
- 19 Use a push stick for ripping boards ___ inches or less.
- 20 The ___ on the table saw can be tilted.
- 21 The ___ jointer table adjusts the depth of cut.
- 23 The width of a board run across the jointer should be at least ___ inches.
- 24 The length of a board run across the jointer should be at least ___ inches.
- 25 Never ___ a machine for another student.